Installation

First – Make sure you have the latest Firmware! (Currently 1.1.2)

https://www.behringer.com/Categories/Behringer/Keyboards/Synthesizers-and-Samplers/DEEPMIND-12/p/P0AC5/Downloads#googtrans(en|en)
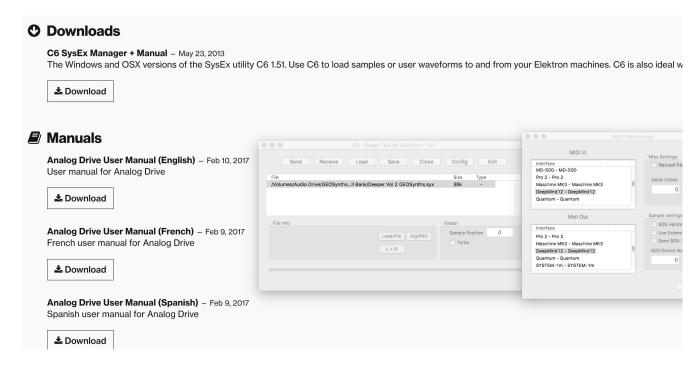
You can Drag and Drop them in the Editor, however make sure you have the latest version of the App as I have noticed it transforms Pitch Wheel data into a different Value.

I suggest you transfer them over to your DeepMind via some SYSEX Software.

I have Duplicated the 128 Sounds for each Each Bank Location on the Synth (A to F), so you can choose which one you want to load into which slot.

There are links to Tools on my website - http://www.geosynths.com/tools

1. Using C6, make sure you can see the DeepMind 12 in the "Config Menu" and select them for both Midi Input and Output.

2. When you press "Send" you should see a message on the DM12 Screen saying it is "Receiving".

If not, then there is a good chance that the DM12 Global Settings have changed; here is what they should be (For USB)

Important aspect is that "DEVICE-ID" is "1"

>CONNECTIVITY
DEVICE-ID   1
MIDI SETTINGS   --->
USB SETTING   --->
WIFI SETTINGS   --->
NETWORK SETTINGS --->
EXPORT   --->

[YES] > MIDI SETTINGS

>USB SETTINGS
USB-CTRL   Nrpn
PROG-CHANGE   RX-TX
RX-CHANNEL   1
TX-CHANNEL   1
USB>MIDI-THRU   Off
USB>WIFI-THRU   Off

[GLOB] > BACK

PROG   FX   GLOBAL COMPARE WRITE